




RESIDENTIAL* HOME CONNECTION

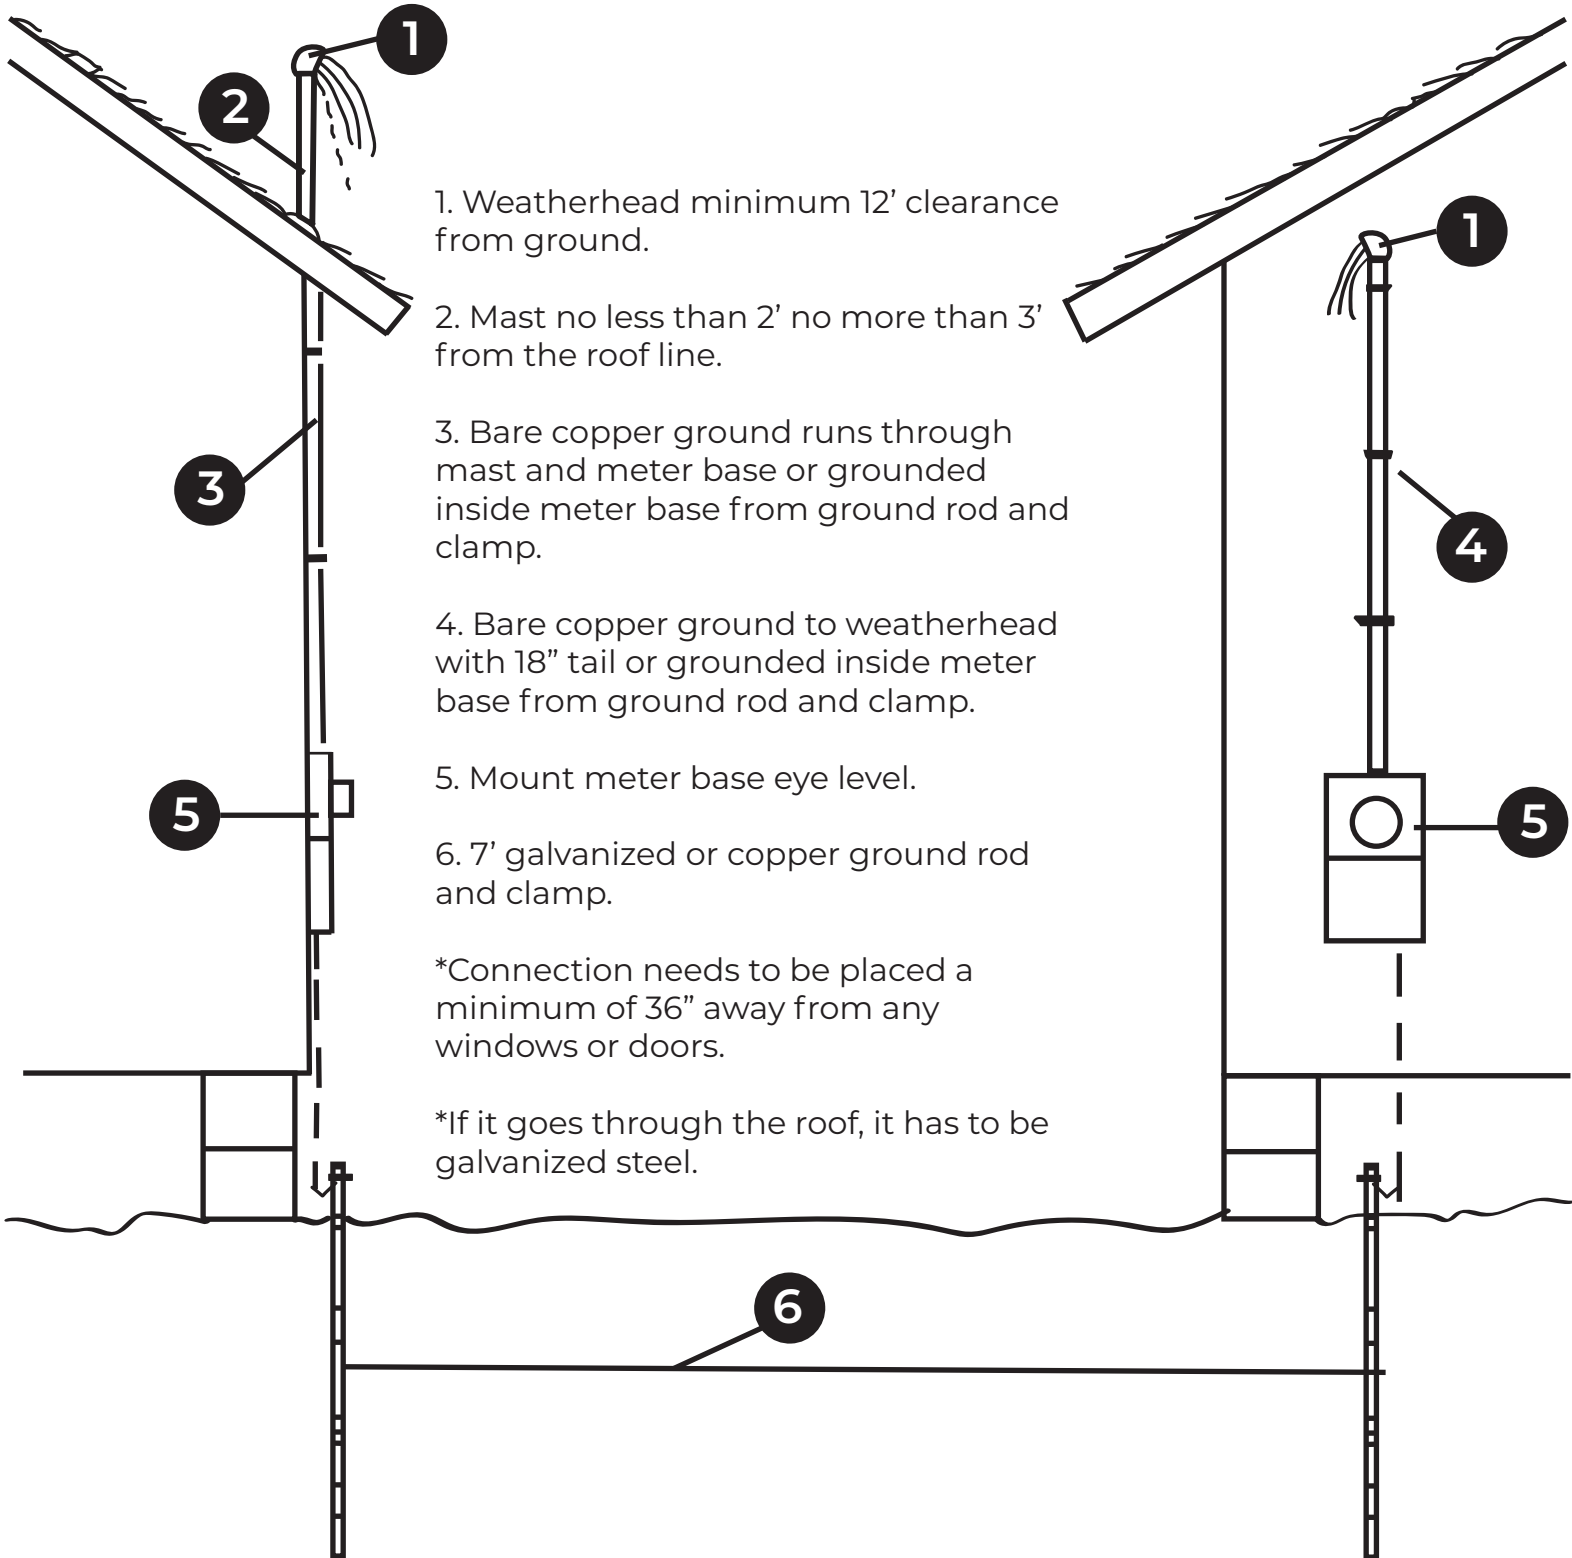

1. Weatherhead minimum 12' clearance from ground.

2. Mast no less than 2' no more than 3' from the roof line.

3. Bare copper ground runs through mast and meter base or grounded inside meter base from ground rod and clamp.

4. Bare copper ground to weatherhead with 18" tail or grounded inside meter base from ground rod and clamp.

5. Mount meter base eye level.

6. 7' galvanized or copper ground rod and clamp.

*Connection needs to be placed a minimum of 36" away from any windows or doors.

*If it goes through the roof, it has to be galvanized steel.